

MULTI-HOUSING

Speed Queen® Horizon®
Quantum™ Front Control
Commercial Washers & Dryers

COIN
CARD VEND

Speed Queen®



BUILT FOR **RELIABLE** PERFORMANCE.

The Speed Queen® Horizon® line of washers and dryers are ready to meet the demands of your laundry room. Equipped with our elite Quantum™ Controls and designed to work as a single or stacked laundry setup, they provide maximum energy efficiency and long-lasting performance. Speed Queen front load laundry products have met every design standard to be 100% ADA compliant.

HORIZON® MACHINES PROVIDE:

- ENERGY STAR® qualification that uses less energy, saves money and helps protect the environment
- Water use as low as 11.0 gallons (41.7 liters) per cycle to reduce operating costs.
- Efficient dryer heating with 25,000 BTU (gas models) and 5,350 Watts (electric models) provide fast drying and lower operating costs.


Quantum Controls offer total automated management of your laundry room. Its simple, powerful programming gives you the ability to:

- Easily manage your laundry operation with remote internet access.
- Establish multi-level vend prices, soil level cycles and dryer top-off times on your machines.
- Track coin or card transactions.



FRONT LOAD WASHER

The Speed Queen front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs through advanced programmability.

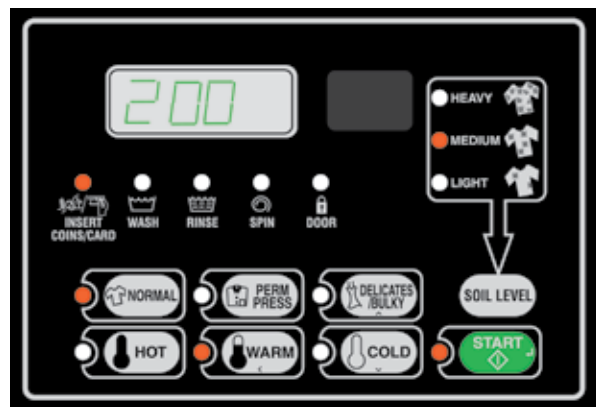

FEATURES

HIGH SPEED EXTRACT

1000 RPM final spin exerts 300 G-Force to maximize moisture removal from clothes.

BIG LOAD DOOR OPENING

Extra wide 15.5" (394 cm) for easy loading and unloading of clothes.

STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.


CONTROL TYPES



Coin ("C")



Prep for Coin ("X")



Prep for Card ("Y")

SINGLE LOAD DRYER

Speed Queen's front control dryer, defined by its simplicity and its performance, provides everything you need to get the job done – and nothing you don't. Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency.



FEATURES

SUPERIOR DRYING CONVENIENCE

With a 2.06 sq. ft. (1914 cm²) door opening, making it the widest in the industry, Speed Queen dryers offer the convenience of easy loading and unloading.

EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Speed Queen dryers offer some of the fastest drying times in the industry.

UPFRONT LINT FILTER

Easy to clean and secured.


REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.




STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Available with see-through or solid door models.

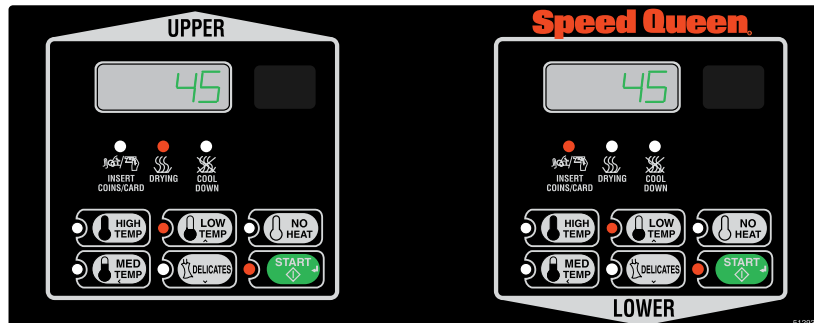

STACK WASHER/DRYER

Speed Queen's stack washer/dryers bring an innovative stacked concept that takes up half the floor space that a conventional washer and dryer does when situated side by side. The freestanding softmount design can be installed on most floor types or levels. Both washer and dryer have the same hookups and connections as a standard washer and dryer. No additional plumbing or electrical change is needed. Same great features as the front control washer and dryer for superior washing and drying convenience.

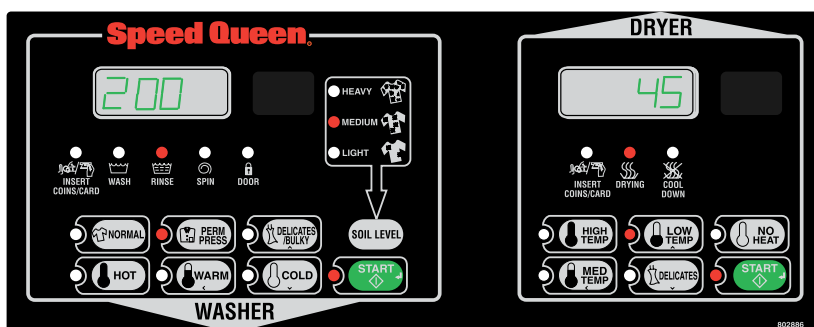

	Washers	Single Load Dryers	Stack Dryers	Stack Washer/Dryers
	SFNLCF5, SFNLCFJ, SFNLYF5, SFNLYFJ	Electric: SDELCFG, SDELYFG Gas: SDGLCFG, SDGLYFG	Electric: SSELCFG5, SSELCFGW, SSELYFG5, SSELYFGW, SSGLCFG5, SSGLCFGW, SSGLYFG5, SSGLYFGW	Electric: STELCFS, STELYFS Gas: STGLCF5, STGLYFS
Basket/Cylinder Volume - cu.ft. (liters)	2.84 (80)	70 (198)	70 (198)	2.84 (80)/70 (198)
Width - in (mm)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)
Depth - in (mm)	28" (711)	28" (711)	28" (711)	28" (711)
Height* - in (mm)	43" (1092)	43" (1092)	76 5/8" (1946)	76 5/8" (1946)
Weight - lb (kg)	250 (113)	Electric: 150 (68) Gas: 155 (70)	Electric: 265 (120) Gas: 275 (125)	Electric: 360 (163) Gas: 365 (166)
Shipping Weight - lb (kg)	270 (123)	Electric: 160 (73) Gas: 165 (75)	Electric: 280 (127) Gas: 290 (132)	Electric: 390 (177) Gas: 395 (179)
Cycle Time - minutes (default)	27	45	45	27/45
Motor HP (Capacitor Start and Thermal Protected)	1 HP, 750W	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps	1 HP, 750W 1/3 HP, 5.5 amps
Water Consumption - gal (Liter)	11.0 (41.7)	N/A	N/A	11.0 (41.7)
Water Factor - gal/ft ³ (Liters/Liter/cycle)	4.0 (0.53)	N/A	N/A	4.0 (0.53)
Modified Energy Factor - ft ³ /kWh/cycle (Liters/kWh/cycle)	2.40 (67.97)	N/A	N/A	2.40 (67.97)
Average Hot Water Usage - gal (Liter)	0.9 (3.3)	N/A	N/A	0.9 (3.3)
Water Pressure - psi (bar)	Pressure fill 20 to 120 (1.4/8.3)	N/A	N/A	Pressure fill 20 to 120 (1.4/8.3)
Spin Speed - RPM	500, 650, 1000	N/A	N/A	500, 650, 1000
Cycle/Temperature	Hot Normal Warm Perm Press Cold Delicate	High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat	High 160 ° Medium 155 ° Low 145 ° Delicate 115 ° No Heat	See washer and dryer columns for corresponding cycles and temperatures.
Electrical Specifications and Circuit Requirements	120/60/1-15 amp	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp Gas: 120-60/1-15 amp	Electric: 120/240/60/1-30 amp 2 ea 120/208/60/1-30 amp Gas: 2 ea 120-60/1-15 amp	See washer and dryer columns for corresponding cycles and temperatures.
Btu per Hour (kcal)	N/A	25,000 (6300)	25,000 (6300)	25,000 (6300)
Heating Element**	N/A	5350W, 240V 4750W, 208V	5350W, 240V 4750W, 208V	5350W, 240V 4750W, 208V
Type of Gas (Gas models only)	N/A	Factory-equipped natural/mixed gas convertible to LP gas***	Factory-equipped natural/mixed gas convertible to LP gas***	Factory-equipped natural/mixed gas convertible to LP gas***
Utility Connections - in (mm)	N/A	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	N/A	4" (102)	4" (102)	4" (102)
Exhaust Airflow† - cfm (liters/sec)	N/A	220 (105)	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	N/A	0.6" W.C.	0.6" W.C.	0.6" W.C.
Agency Approval	cULus	Electric: cULus Gas: CSA Star	Electric: cULus Gas: CSA Star	Electric: cULus Gas: CSA Star
Activation	Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op
Top and Lid Finish	Porcelain	Porcelain	N/A	N/A
Colors	White	White	White	White
Door Type	Window	Solid	Solid, Window	Window

* Heights may vary slightly depending on leveling adjustments.

** Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

*** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

Printed in the U.S.A.

© Copyright 2012 Alliance Laundry Systems LLC

